



A42x1B Connector 6

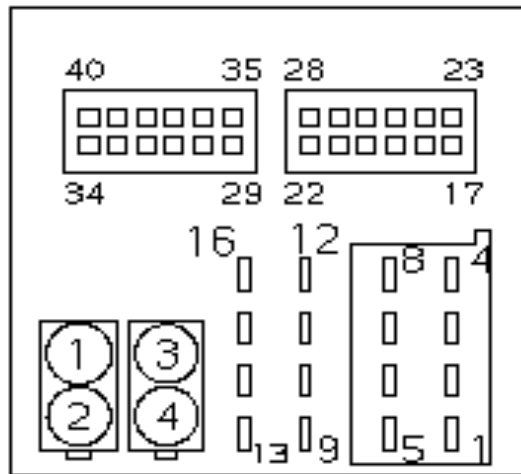

Pin No.	Description	Pin No.	Description
1	LF - Rear Right (+)	21	FBAS (+) (TRSVC)
2	LF - Front Right (+)	22	MIC 1 -
3	LF - Front Left (+)	23	FBAS Shield (TRSVC)
4	LF - Rear Left (+)	24	FBAS (-) (TRSVC)
5	LF - Rear Right (-)	25	MIC 2 Shield
6	LF - Front Right (-)	26	FBAS Shield (NiVi)
7	LF - Front Left (-)	27	FBAS (-) (NiVi)
8	LF - Rear Left (-)	28	FBAS (+) (NiVi)
9	CAN LOW	29	ETH_A (ZGW-pin13)
10	NOT USED	30	AUX IN Left
11	CAN HIGH	31	
12	GND	32	
13	RADIO ON (CIC)	33	MIC 1 Shield
14	NOT USED	34	FBAS (+) (TV)
15	POWER 12v - Terminal 30 - 20Amp	35	AUX IN Right
16	NOT USED	36	AUX IN GND
17	MIC 1 (+)	37	
18	MIC 2 (+)	38	FBAS Shield (TV)
19	MIC 2 (-)	39	AUX Shield
20	NOT USED	40	FBAS (-) (TV)

A42x3B Connector 7

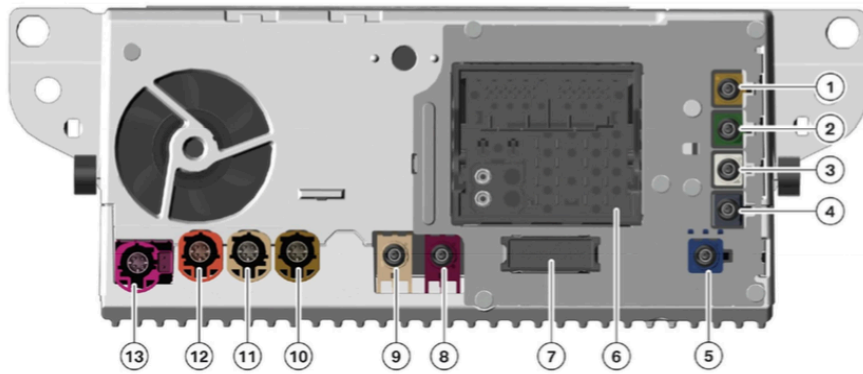

Pin No.	Description
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	ETH_TX+ - ZGW - pin 11
18	ETH_RX+ - ZGW - pin 9
19	ETH_TX- - ZGW - pin 12
20	ETH_RX- - ZGW - pin 18